


Ecodesign requirements for variable speed drives

Technical documentation for the purposes of conformity assessment pursuant to Directive 2009/125/EC

(1) Losses

Power losses :

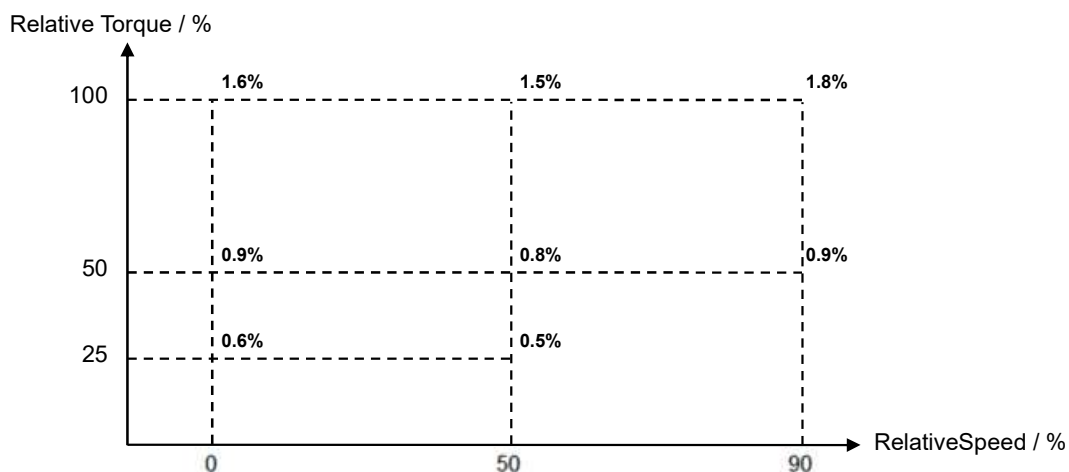

Standby losses : 66.2 W

(2) Efficiency level

IE2

(3) Manufacturer's name or trade mark, commercial registration number and address

Toshiba Schneider Inverter Corporation

MAZAK ART PLAZA 13F, 1-19-30, Aoi, Higashi Ward, Nagoya City, Aichi Prefecture,

460-0004, Japan

(4) Product's model identifier

VFAS3-4132KPC

Series : TOSVERT VF-AS3
Nominal frequency : 50 Hz
Over load: 150% - 1min

(5) Apparent output power

164.5 kVA

(6) Motor rated power output P_n

132 kW

(7) Rated output current

250 A

(8) Maximum operating temperature

50 °C

(9) Rated supply frequency

50 Hz

(10) Rated supply voltage

380 VAC


(11) Exemption

Ecodesign requirements for variable speed drives

Technical documentation for the purposes of conformity assessment pursuant to Directive 2009/125/EC

(1) Losses

Power losses :

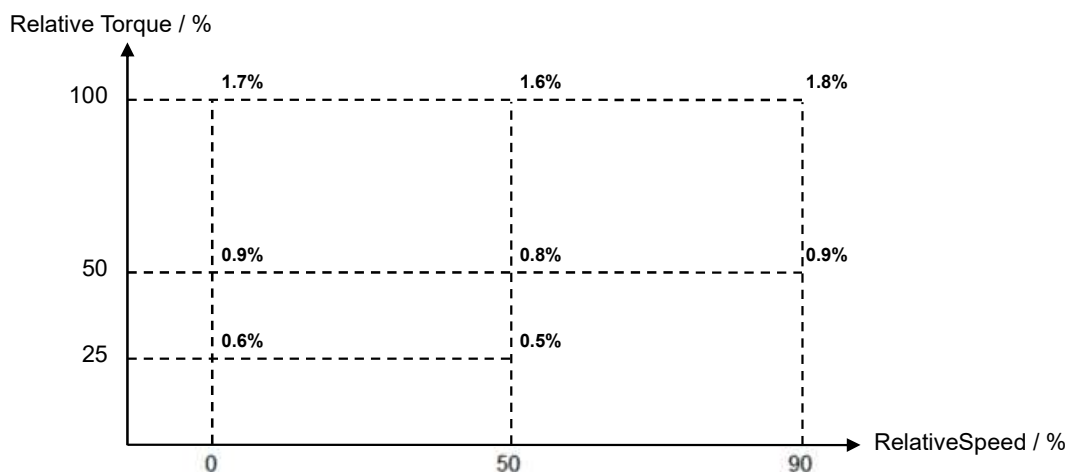

Standby losses : 66.2 W

(2) Efficiency level

IE2

(3) Manufacturer's name or trade mark, commercial registration number and address

Toshiba Schneider Inverter Corporation

MAZAK ART PLAZA 13F, 1-19-30, Aoi, Higashi Ward, Nagoya City, Aichi Prefecture,

460-0004, Japan

(4) Product's model identifier

VFAS3-4132KPC

Series : TOSVERT VF-AS3
Nominal frequency : 50 Hz
Over load: 120% - 1min

(5) Apparent output power

198.8 kVA

(6) Motor rated power output P_n

160 kW

(7) Rated output current

302 A

(8) Maximum operating temperature

50 °C

(9) Rated supply frequency

50 Hz

(10) Rated supply voltage

380 VAC


(11) Exemption

Ecodesign requirements for variable speed drives

Technical documentation for the purposes of conformity assessment pursuant to Directive 2009/125/EC

(1) Losses

Power losses :

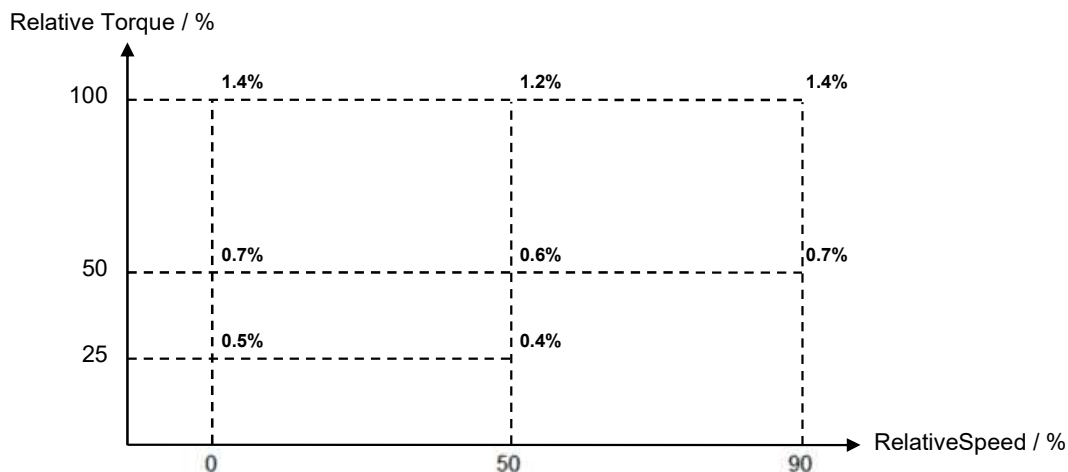

Standby losses : 74.2 W

(2) Efficiency level

IE2

(3) Manufacturer's name or trade mark, commercial registration number and address

Toshiba Schneider Inverter Corporation

MAZAK ART PLAZA 13F, 1-19-30, Aoi, Higashi Ward, Nagoya City, Aichi Prefecture,

460-0004, Japan

(4) Product's model identifier

VFAS3-4132KPC

Series : TOSVERT VF-AS3
Nominal frequency : 50 Hz
Over load : 150% - 1min

(5) Apparent output power

207.8 kVA

(6) Motor rated power output Pn

132 kW

(7) Rated output current

250 A

(8) Maximum operating temperature

50 °C

(9) Rated supply frequency

50 Hz

(10) Rated supply voltage

480 VAC


(11) Exemption

Ecodesign requirements for variable speed drives

Technical documentation for the purposes of conformity assessment pursuant to Directive 2009/125/EC

(1) Losses

Power losses :

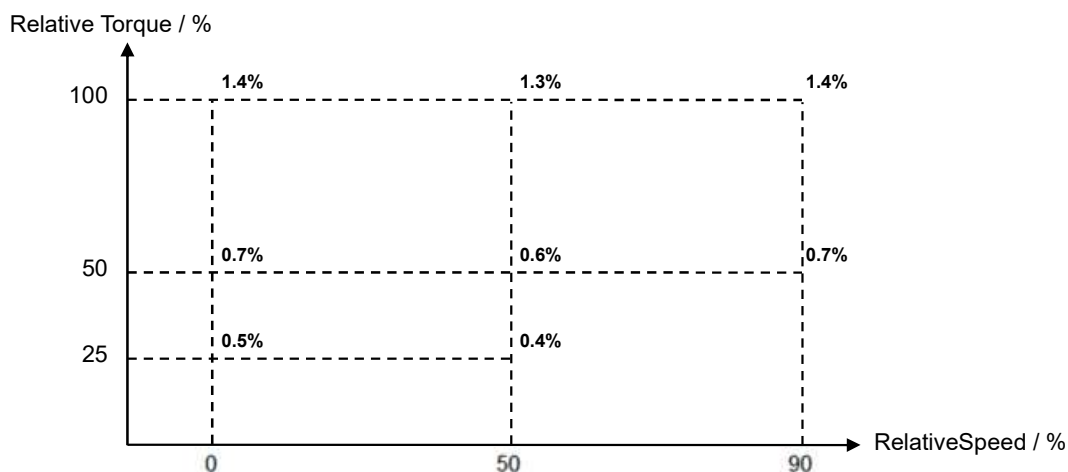

Standby losses : 74.2 W

(2) Efficiency level

IE2

(3) Manufacturer's name or trade mark, commercial registration number and address

Toshiba Schneider Inverter Corporation

MAZAK ART PLAZA 13F, 1-19-30, Aoi, Higashi Ward, Nagoya City, Aichi Prefecture,

460-0004, Japan

(4) Product's model identifier

VFAS3-4132KPC

Series : TOSVERT VF-AS3
Nominal frequency : 50 Hz
Over load: 120% - 1min

(5) Apparent output power

251.1 kVA

(6) Motor rated power output P_n

160 kW

(7) Rated output current

302 A

(8) Maximum operating temperature

50 °C

(9) Rated supply frequency

50 Hz

(10) Rated supply voltage

480 VAC

(11) Exemption