


Ecodesign requirements for variable speed drives

Technical documentation for the purposes of conformity assessment pursuant to Directive 2009/125/EC

(1) Losses

Power losses :

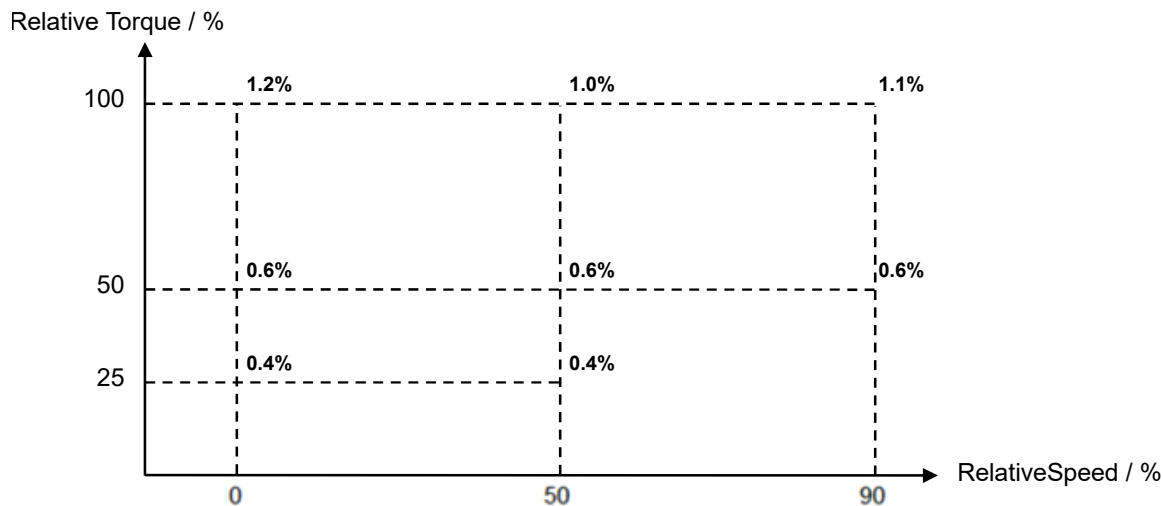

Standby losses : 61.6 W

(2) Efficiency level

IE2

(3) Manufacturer's name or trade mark, commercial registration number and address

Toshiba Schneider Inverter Corporation

MAZAK ART PLAZA 13F, 1-19-30, Aoi, Higashi Ward, Nagoya City, Aichi Prefecture,

460-0004, Japan

(4) Product's model identifier

VFAS3J-4900PC
+DCL1-4900

Series : TOSVERT VF-AS3J
Nominal frequency : 50 Hz
Over load: 150% - 1min

(5) Apparent output power

117.8 kVA

(6) Motor rated power output Pn

90 kW

(7) Rated output current

179 A

(8) Maximum operating temperature

50 °C

(9) Rated supply frequency

50 Hz

(10) Rated supply voltage

380 VAC


(11) Exemption

Ecodesign requirements for variable speed drives

Technical documentation for the purposes of conformity assessment pursuant to Directive 2009/125/EC

(1) Losses

Power losses :

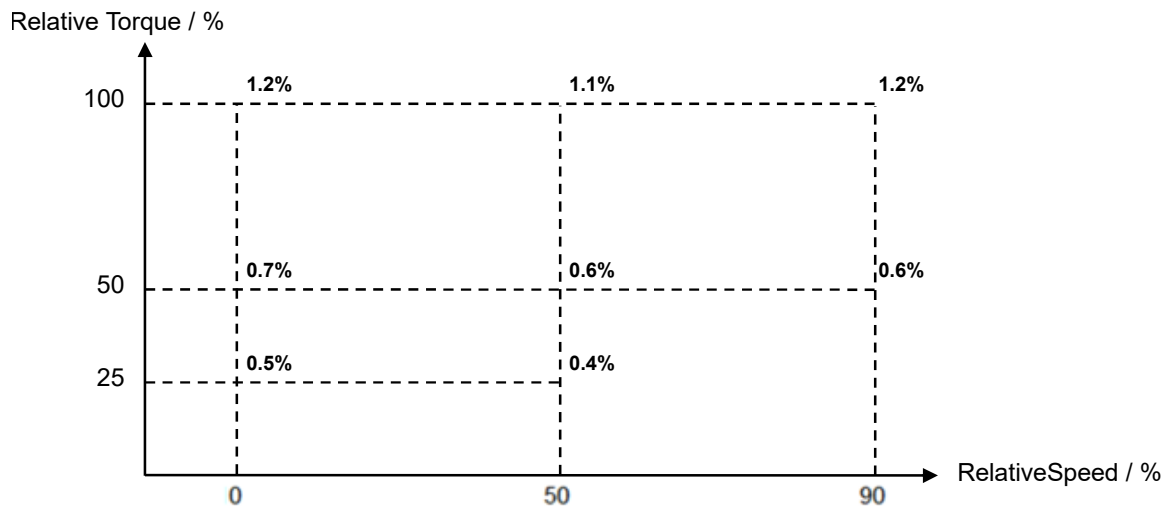

Standby losses : 61.6 W

(2) Efficiency level

IE2

(3) Manufacturer's name or trade mark, commercial registration number and address

Toshiba Schneider Inverter Corporation

MAZAK ART PLAZA 13F, 1-19-30, Aoi, Higashi Ward, Nagoya City, Aichi Prefecture,

460-0004, Japan

(4) Product's model identifier

VFAS3J-4900PC
+DCL1-4900

Series : TOSVERT VF-AS3J
Nominal frequency : 50 Hz
Over load: 120% - 1min

(5) Apparent output power

138.9 kVA

(6) Motor rated power output P_n

110 kW

(7) Rated output current

211 A

(8) Maximum operating temperature

40 °C

(9) Rated supply frequency

50 Hz

(10) Rated supply voltage

380 VAC


(11) Exemption

Ecodesign requirements for variable speed drives

Technical documentation for the purposes of conformity assessment pursuant to Directive 2009/125/EC

(1) Losses

Power losses :

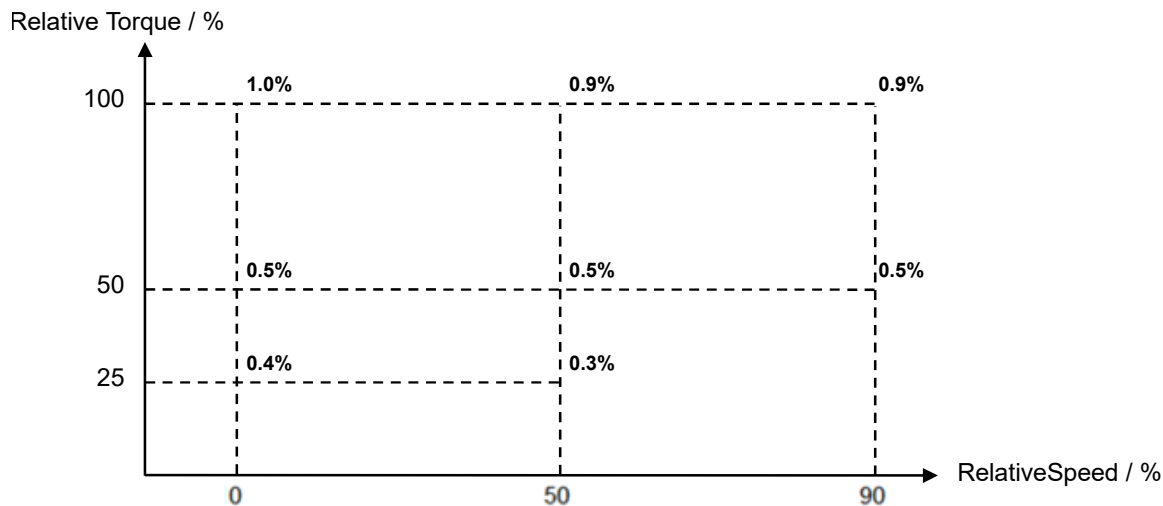

Standby losses : 70.2 W

(2) Efficiency level

IE2

(3) Manufacturer's name or trade mark, commercial registration number and address

Toshiba Schneider Inverter Corporation

MAZAK ART PLAZA 13F, 1-19-30, Aoi, Higashi Ward, Nagoya City, Aichi Prefecture,

460-0004, Japan

(4) Product's model identifier

VFAS3J-4900PC
+DCL1-4900

Series : TOSVERT VF-AS3J
Nominal frequency : 50 Hz
Over load: 150% - 1min

(5) Apparent output power

148.8 kVA

(6) Motor rated power output P_n

90 kW

(7) Rated output current

179 A

(8) Maximum operating temperature

50 °C

(9) Rated supply frequency

50 Hz

(10) Rated supply voltage

480 VAC


(11) Exemption

Ecodesign requirements for variable speed drives

Technical documentation for the purposes of conformity assessment pursuant to Directive 2009/125/EC

(1) Losses

Power losses :

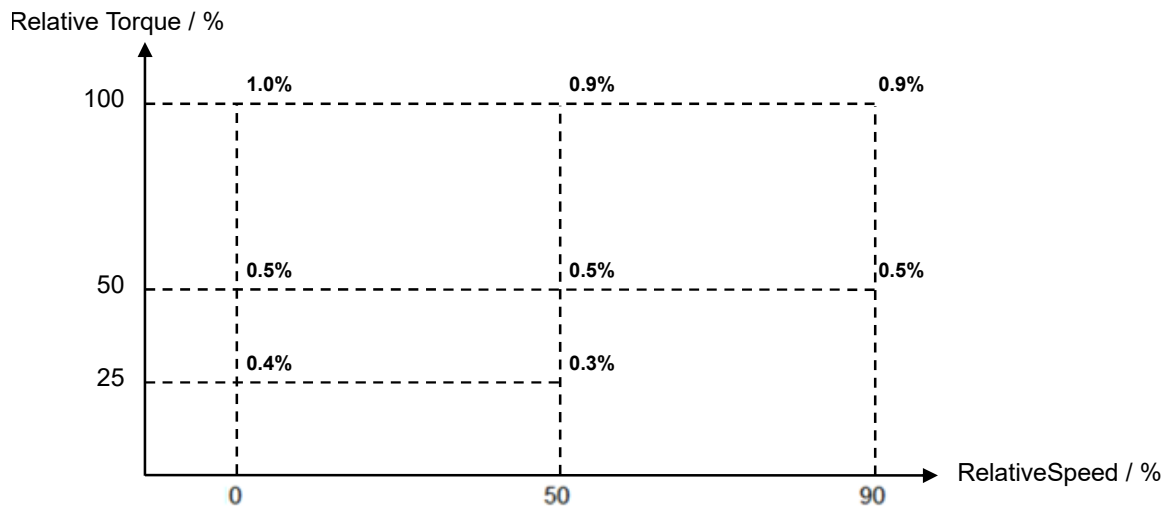

Standby losses : 70.2 W

(2) Efficiency level

IE2

(3) Manufacturer's name or trade mark, commercial registration number and address

Toshiba Schneider Inverter Corporation

MAZAK ART PLAZA 13F, 1-19-30, Aoi, Higashi Ward, Nagoya City, Aichi Prefecture,

460-0004, Japan

(4) Product's model identifier

VFAS3J-4900PC
+DCL1-4900

Series : TOSVERT VF-AS3J
Nominal frequency : 50 Hz
Over load: 120% - 1min

(5) Apparent output power

175.4 kVA

(6) Motor rated power output Pn

110 kW

(7) Rated output current

211 A

(8) Maximum operating temperature

40 °C

(9) Rated supply frequency

50 Hz

(10) Rated supply voltage

480 VAC

(11) Exemption