


# Ecodesign requirements for variable speed drives

Technical documentation for the purposes of conformity assessment pursuant to Directive 2009/125/EC

(1) Losses

Power losses :

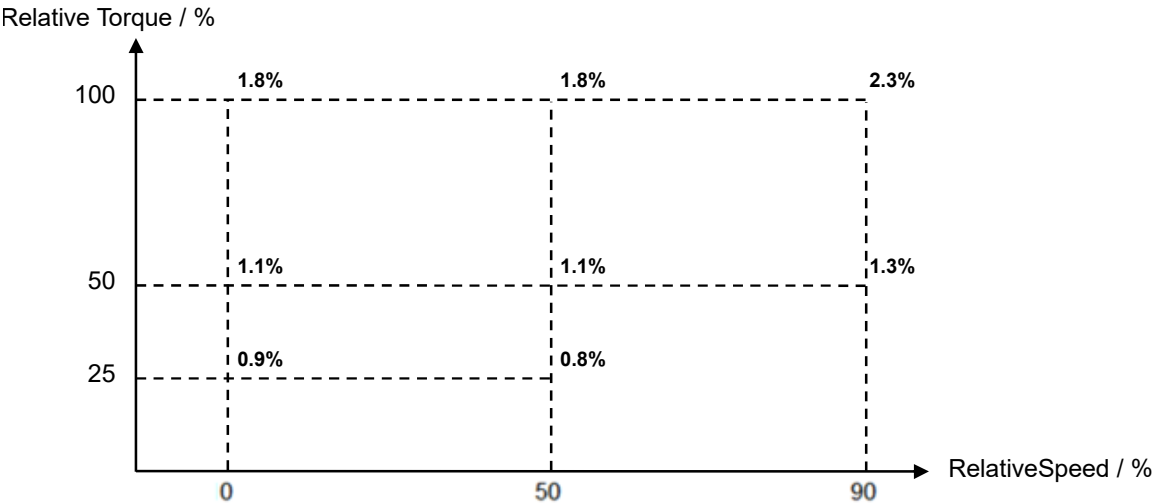

Standby losses : 6.3 W

(2) Efficiency level

IE2

(3) Manufacturer's name or trade mark, commercial registration number and address

Toshiba Schneider Inverter Corporation  
  
MAZAK ART PLAZA 13F, 1-19-30, Aoi, Higashi Ward, Nagoya City, Aichi Prefecture,  
  
460-0004, Japan

(4) Product's model identifier

|             |                     |                |
|-------------|---------------------|----------------|
| VFNC3-2037P | Series :            | TOSVERT VF-nC3 |
|             | Nominal frequency : | 50 Hz          |
|             | Over load:          | 150% - 1min    |

(5) Apparent output power

5.8 kVA

(6) Motor rated power output Pn

4 kW

(7) Rated output current

16.7 A

(8) Maximum operating temperature

50 °C

(9) Rated supply frequency

50 Hz

(10) Rated supply voltage

200 VAC


(11) Exemption

# Ecodesign requirements for variable speed drives

Technical documentation for the purposes of conformity assessment pursuant to Directive 2009/125/EC

(1) Losses

Power losses :

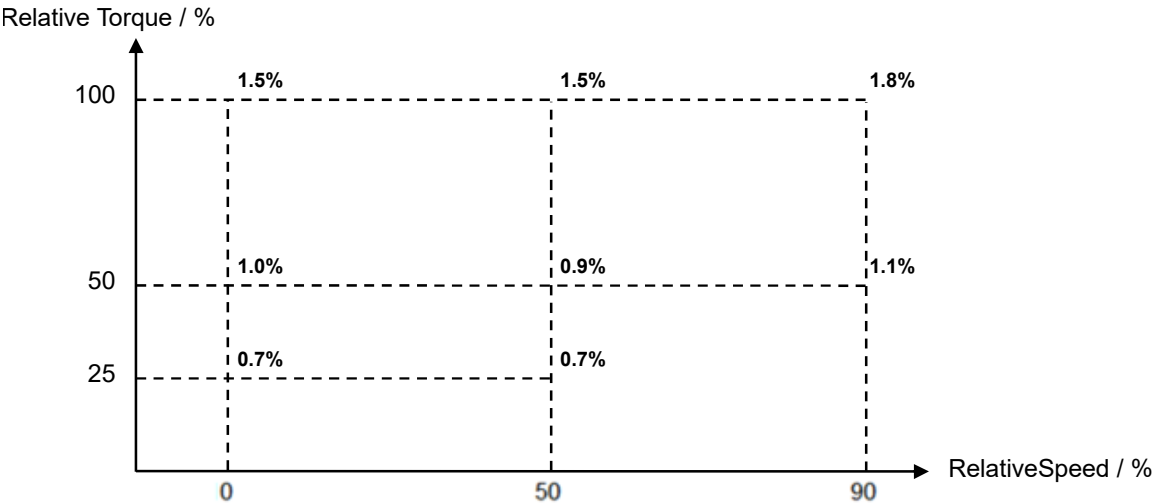

Standby losses : 6.5 W

(2) Efficiency level

IE2

(3) Manufacturer’s name or trade mark, commercial registration number and address

Toshiba Schneider Inverter Corporation  
  
MAZAK ART PLAZA 13F, 1-19-30, Aoi, Higashi Ward, Nagoya City, Aichi Prefecture,  
  
460-0004, Japan

(4) Product’s model identifier

|                    |                     |                |
|--------------------|---------------------|----------------|
| <b>VFNC3-2037P</b> | Series :            | TOSVERT VF-nC3 |
|                    | Nominal frequency : | 50 Hz          |
|                    | Over load:          | 150% - 1min    |

(5) Apparent output power

6.9 kVA

(6) Motor rated power output Pn

4 kW

(7) Rated output current

16.7 A

(8) Maximum operating temperature

50 °C

(9) Rated supply frequency

50 Hz

(10) Rated supply voltage

240 VAC

(11) Exemption