


# Ecodesign requirements for variable speed drives

Technical documentation for the purposes of conformity assessment pursuant to Directive 2009/125/EC

## (1) Losses

Power losses :

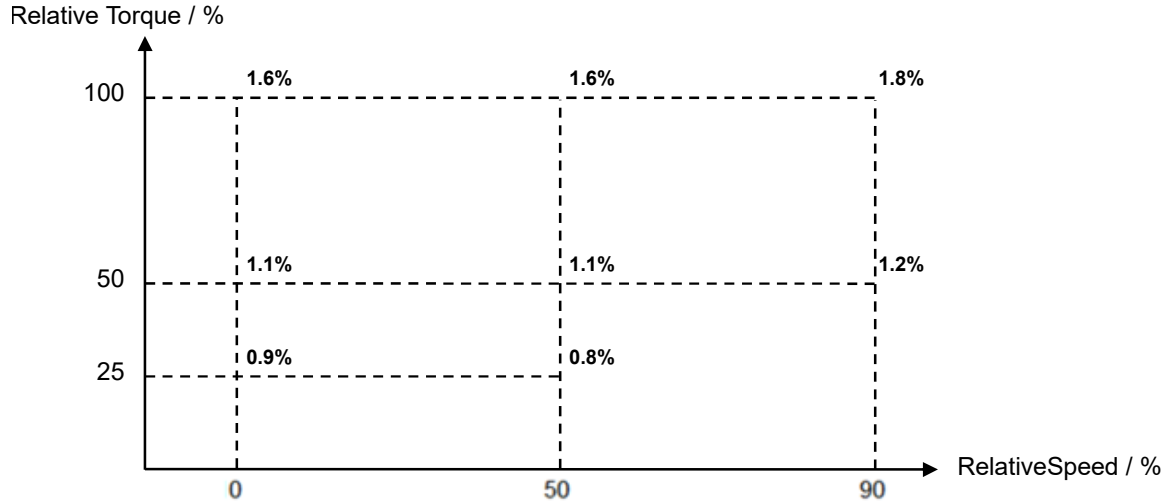

Standby losses : 18.4 W

## (2) Efficiency level

**IE2**

## (3) Manufacturer's name or trade mark, commercial registration number and address

Toshiba Schneider Inverter Corporation

MAZAK ART PLAZA 13F, 1-19-30, Aoi, Higashi Ward, Nagoya City, Aichi Prefecture,

460-0004, Japan

## (4) Product's model identifier

**VFNC3C-4037P**

Series : TOSVERT VF-nC3C  
Nominal frequency : 50 Hz  
Over load: 150% - 1min

## (5) Apparent output power

6.3 kVA

## (6) Motor rated power output P<sub>n</sub>

3.7 kW

## (7) Rated output current

9.5 A

## (8) Maximum operating temperature

55 °C

## (9) Rated supply frequency

50 Hz

## (10) Rated supply voltage

380 VAC


## (11) Exemption

# Ecodesign requirements for variable speed drives

Technical documentation for the purposes of conformity assessment pursuant to Directive 2009/125/EC

## (1) Losses

Power losses :

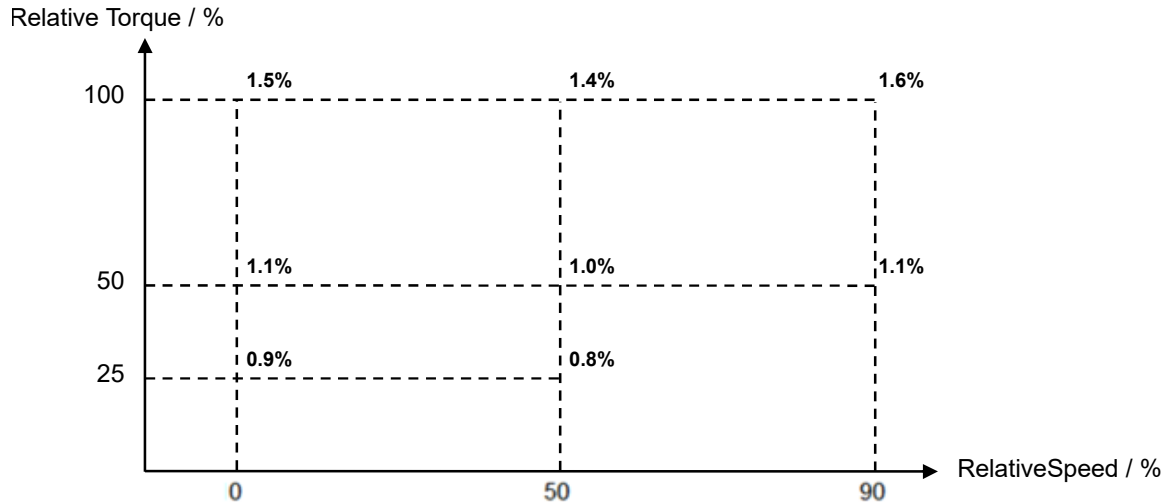

Standby losses : 24.3 W

## (2) Efficiency level

**IE2**

## (3) Manufacturer's name or trade mark, commercial registration number and address

Toshiba Schneider Inverter Corporation

MAZAK ART PLAZA 13F, 1-19-30, Aoi, Higashi Ward, Nagoya City, Aichi Prefecture,

460-0004, Japan

## (4) Product's model identifier

**VFNC3C-4037P**

Series : TOSVERT VF-nC3C  
Nominal frequency : 50 Hz  
Over load: 150% - 1min

## (5) Apparent output power

7.6 kVA

## (6) Motor rated power output Pn

3.7 kW

## (7) Rated output current

9.5 A

## (8) Maximum operating temperature

55 °C

## (9) Rated supply frequency

50 Hz

## (10) Rated supply voltage

460 VAC

## (11) Exemption