


# Ecodesign requirements for variable speed drives

Technical documentation for the purposes of conformity assessment pursuant to Directive 2009/125/EC

(1) Losses

Power losses :

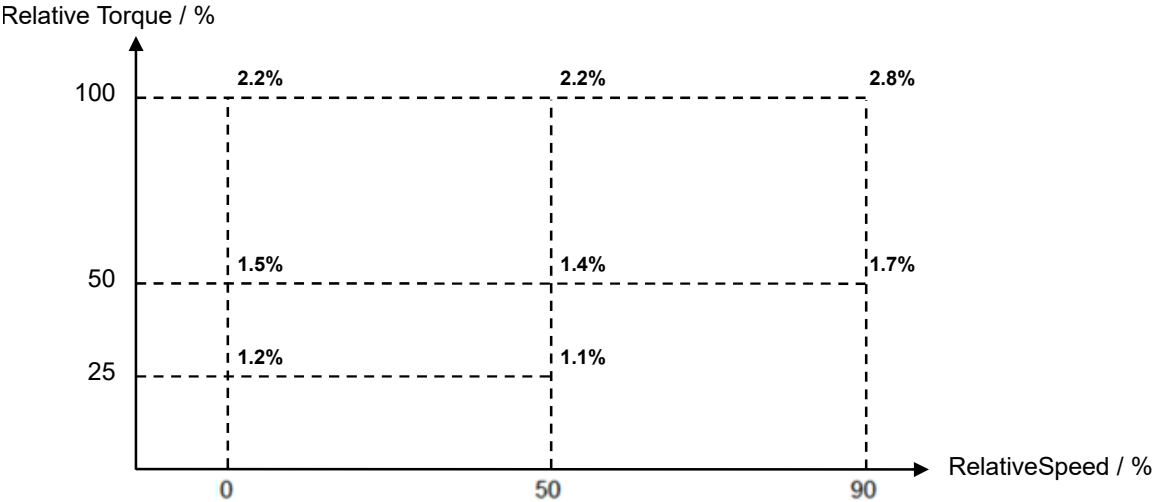

Standby losses : 6.2 W

(2) Efficiency level

IE2

(3) Manufacturer's name or trade mark, commercial registration number and address

Toshiba Schneider Inverter Corporation  
  
MAZAK ART PLAZA 13F, 1-19-30, Aoi, Higashi Ward, Nagoya City, Aichi Prefecture,  
  
460-0004, Japan

(4) Product's model identifier

**VFNC3S-2015PL**

Series : TOSVERT VF-nC3  
Nominal frequency : 50 Hz  
Over load: 150% - 1min

(5) Apparent output power

2.6 kVA

(6) Motor rated power output Pn

1.5 kW

(7) Rated output current

7.5 A

(8) Maximum operating temperature

50 °C

(9) Rated supply frequency

50 Hz

(10) Rated supply voltage

200 VAC


(11) Exemption

# Ecodesign requirements for variable speed drives

Technical documentation for the purposes of conformity assessment pursuant to Directive 2009/125/EC

(1) Losses

Power losses :

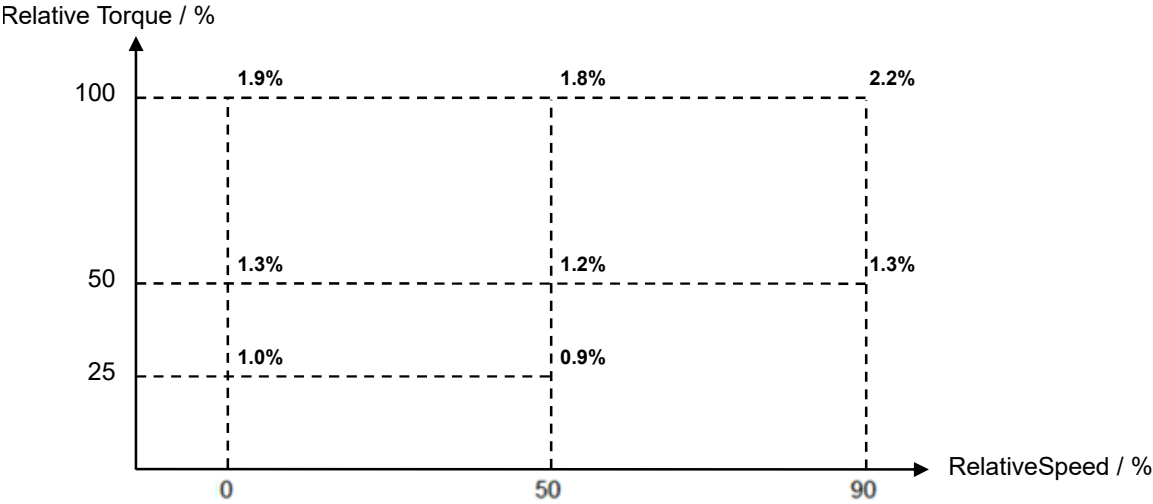

Standby losses : 6.4 W

(2) Efficiency level

IE2

(3) Manufacturer's name or trade mark, commercial registration number and address

Toshiba Schneider Inverter Corporation  
  
MAZAK ART PLAZA 13F, 1-19-30, Aoi, Higashi Ward, Nagoya City, Aichi Prefecture,  
  
460-0004, Japan

(4) Product's model identifier

**VFNC3S-2015PL**

Series : TOSVERT VF-nC3  
Nominal frequency : 50 Hz  
Over load: 150% - 1min

(5) Apparent output power

3.1 kVA

(6) Motor rated power output Pn

1.5 kW

(7) Rated output current

7.5 A

(8) Maximum operating temperature

50 °C

(9) Rated supply frequency

50 Hz

(10) Rated supply voltage

240 VAC

(11) Exemption