
Ecodesign requirements for variable speed drives

Technical documentation for the purposes of conformity assessment pursuant to Directive 2009/125/EC

(1) Losses

Power losses:

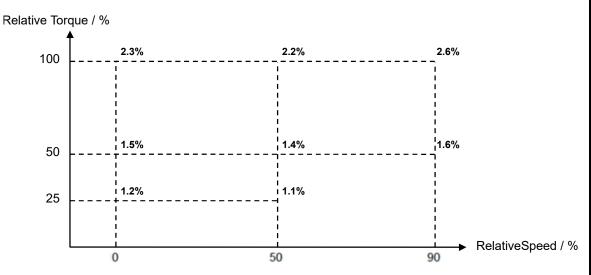

Standby losses: 5.8 W

(2) Efficiency level

IE2

(3) Manufacturer's name or trade mark, commercial registration number and address

Toshiba Schneider Inverter Corporation

MAZAK ART PLAZA 13F, 1-19-30, Aoi, Higashi Ward, Nagoya City, Aichi Prefecture,

460-0004, Japan

(4) Product's model identifier

VFS15S-2007PL

Series: TOSVERT VF-S15

Nominal frequency: 50 Hz
Over load: 150% - 1min


- (5) Apparent output power
- 1.7 kVA
- (6) Motor rated power output Pn
- 0.75 kW
- (7) Rated output current
- 4.8 A
- (8) Maximum operating temperature
- 50 °C
- (9) Rated supply frequency
- 50 Hz
- (10) Rated supply voltage
- 200 VAC
- (11) Exemption

Ecodesign requirements for variable speed drives

Technical documentation for the purposes of conformity assessment pursuant to Directive 2009/125/EC

(1) Losses

Power losses:

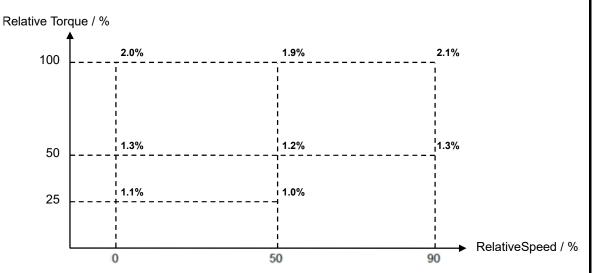

Standby losses: 6 W

(2) Efficiency level

IE2

(3) Manufacturer's name or trade mark, commercial registration number and address

Toshiba Schneider Inverter Corporation

MAZAK ART PLAZA 13F, 1-19-30, Aoi, Higashi Ward, Nagoya City, Aichi Prefecture,

460-0004, Japan

(4) Product's model identifier

VFS15S-2007PL

Series: TOSVERT VF-S15

Nominal frequency : 50 Hz Over load: 150% - 1min

(5) Apparent output power

2 kVA

(6) Motor rated power output Pn

0.75 kW

(7) Rated output current

4.8 A

(8) Maximum operating temperature

50 °C

(9) Rated supply frequency

50 Hz

(10) Rated supply voltage

240 VAC

(11) Exemption