
## Ecodesign requirements for variable speed drives

Technical documentation for the purposes of conformity assessment pursuant to Directive 2009/125/EC

(1) Losses

Power losses:

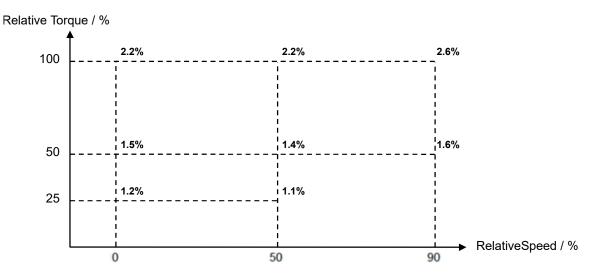

Standby losses: 6.2 W

(2) Efficiency level

## IE2

(3) Manufacturer's name or trade mark, commercial registration number and address

Toshiba Schneider Inverter Corporation

MAZAK ART PLAZA 13F, 1-19-30, Aoi, Higashi Ward, Nagoya City, Aichi Prefecture,

460-0004, Japan

(4) Product's model identifier

VFS15S-2015PL

**TOSVERT VF-S15** Series:

50 Hz Nominal frequency: 150% - 1min

Over load:

(5) Apparent output power

2.8 kVA

(6) Motor rated power output Pn

1.5 kW

(7) Rated output current

(8) Maximum operating temperature

50 °C

(9) Rated supply frequency

50 Hz

(10) Rated supply voltage

200 VAC


(11) Exemption

## Ecodesign requirements for variable speed drives

Technical documentation for the purposes of conformity assessment pursuant to Directive 2009/125/EC

(1) Losses

Power losses:

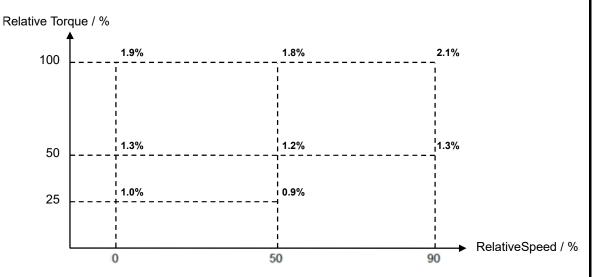

Standby losses: 6.4 W

(2) Efficiency level

## IE2

(3) Manufacturer's name or trade mark, commercial registration number and address

Toshiba Schneider Inverter Corporation

MAZAK ART PLAZA 13F, 1-19-30, Aoi, Higashi Ward, Nagoya City, Aichi Prefecture,

460-0004, Japan

(4) Product's model identifier

VFS15S-2015PL

Series: TOSVERT VF-S15

Nominal frequency : 50 Hz Over load: 150% - 1min

(5) Apparent output power

3.3 kVA

(6) Motor rated power output Pn

1.5 kW

(7) Rated output current

8 A

(8) Maximum operating temperature

50 °C

(9) Rated supply frequency

50 Hz

(10) Rated supply voltage

240 VAC

(11) Exemption