


Ecodesign requirements for variable speed drives

Technical documentation for the purposes of conformity assessment pursuant to Directive 2009/125/EC

(1) Losses

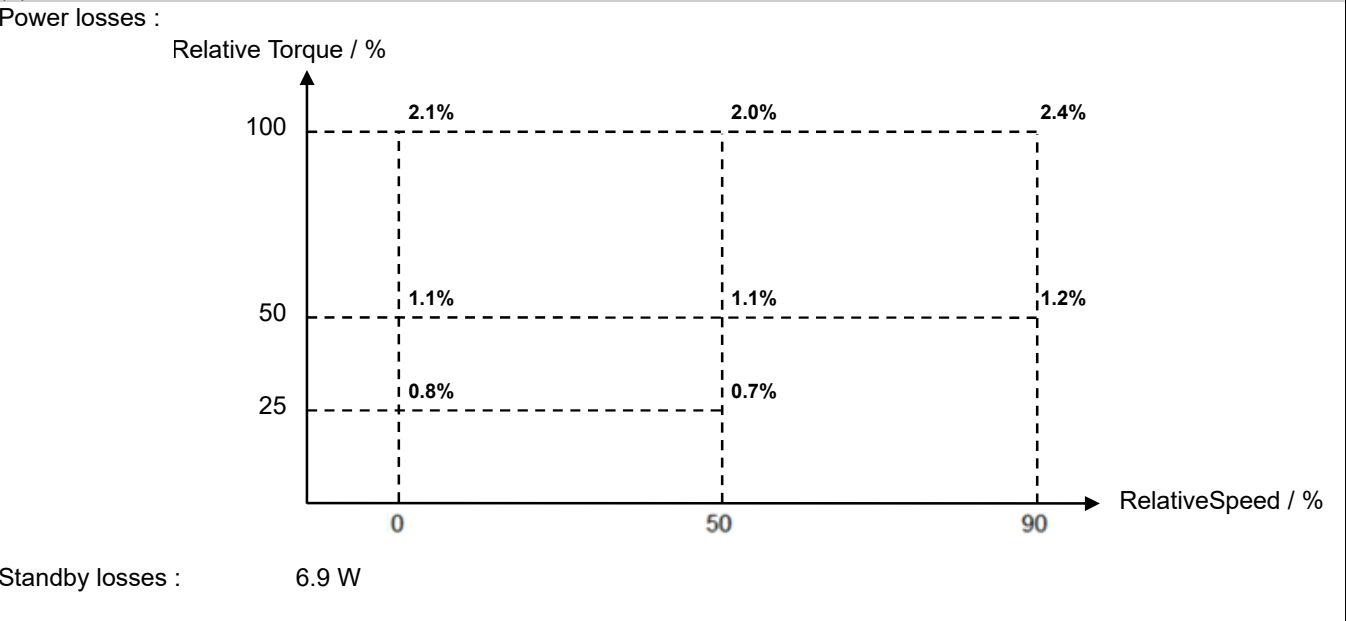

(2) Efficiency level

IE2

(3) Manufacturer's name or trade mark, commercial registration number and address

Toshiba Schneider Inverter Corporation
MAZAK ART PLAZA 13F, 1-19-30, Aoi, Higashi Ward, Nagoya City, Aichi Prefecture,
460-0004, Japan

(4) Product's model identifier

| | | |
|---------------------|---------------------|----------------|
| VFS15-2055PM | Series : | TOSVERT VF-S15 |
| | Nominal frequency : | 50 Hz |
| | Over load: | 150% - 1min |

(5) Apparent output power

9.5 kVA

(6) Motor rated power output Pn

5.5 kW

(7) Rated output current

27.5 A

(8) Maximum operating temperature

50 °C

(9) Rated supply frequency

50 Hz

(10) Rated supply voltage

200 VAC


(11) Exemption

Ecodesign requirements for variable speed drives

Technical documentation for the purposes of conformity assessment pursuant to Directive 2009/125/EC

(1) Losses

Power losses :

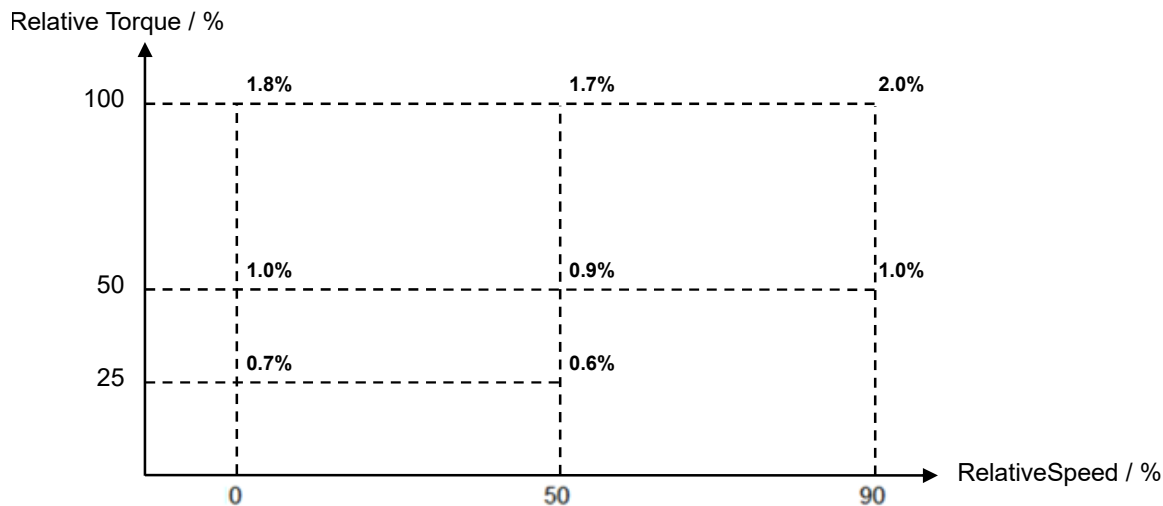

Standby losses : 7.4 W

(2) Efficiency level

IE2

(3) Manufacturer's name or trade mark, commercial registration number and address

Toshiba Schneider Inverter Corporation

MAZAK ART PLAZA 13F, 1-19-30, Aoi, Higashi Ward, Nagoya City, Aichi Prefecture,

460-0004, Japan

(4) Product's model identifier

VFS15-2055PM

Series : TOSVERT VF-S15
Nominal frequency : 50 Hz
Over load: 150% - 1min

(5) Apparent output power

11.4 kVA

(6) Motor rated power output P_n

5.5 kW

(7) Rated output current

27.5 A

(8) Maximum operating temperature

50 °C

(9) Rated supply frequency

50 Hz

(10) Rated supply voltage

240 VAC

(11) Exemption