


# Ecodesign requirements for variable speed drives

Technical documentation for the purposes of conformity assessment pursuant to Directive 2009/125/EC

## (1) Losses

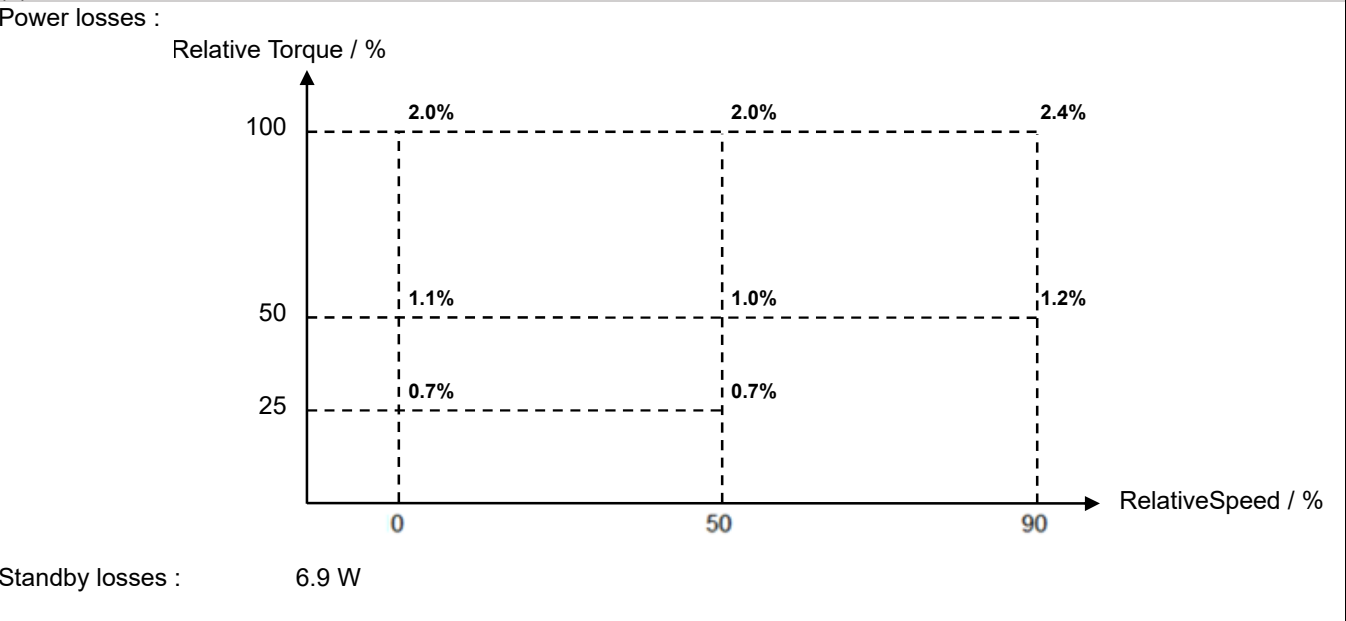

## (2) Efficiency level

IE2

## (3) Manufacturer's name or trade mark, commercial registration number and address

Toshiba Schneider Inverter Corporation  
MAZAK ART PLAZA 13F, 1-19-30, Aoi, Higashi Ward, Nagoya City, Aichi Prefecture,  
460-0004, Japan

## (4) Product's model identifier

<b>VFS15-2075PM</b>	Series :	TOSVERT VF-S15
	Nominal frequency :	50 Hz
	Over load:	150% - 1min

## (5) Apparent output power

11.4 kVA

## (6) Motor rated power output Pn

7.5 kW

## (7) Rated output current

33 A

## (8) Maximum operating temperature

50 °C

## (9) Rated supply frequency

50 Hz

## (10) Rated supply voltage

200 VAC


## (11) Exemption

# Ecodesign requirements for variable speed drives

Technical documentation for the purposes of conformity assessment pursuant to Directive 2009/125/EC

(1) Losses

Power losses :

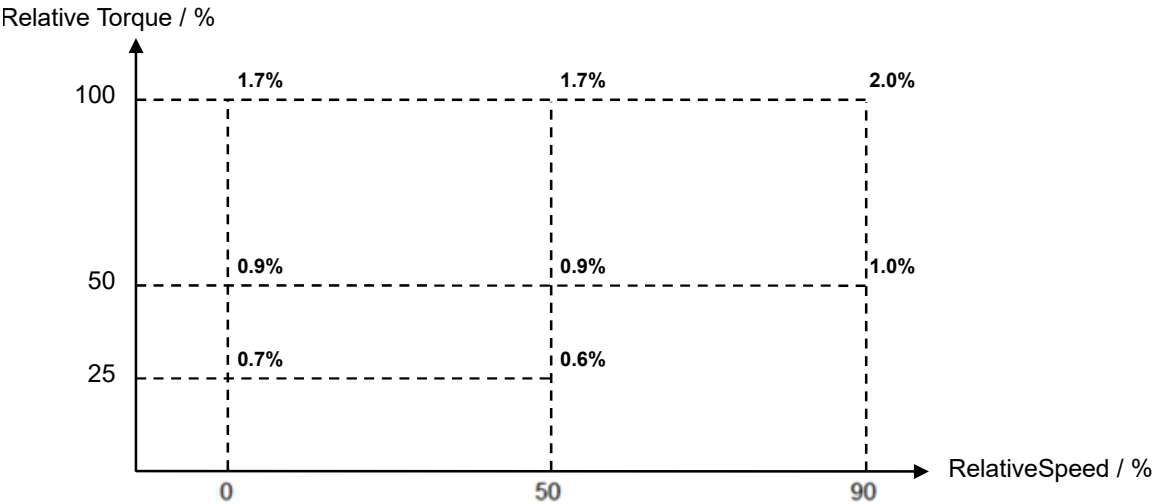

Standby losses : 7.4 W

(2) Efficiency level

IE2

(3) Manufacturer's name or trade mark, commercial registration number and address

Toshiba Schneider Inverter Corporation  
  
MAZAK ART PLAZA 13F, 1-19-30, Aoi, Higashi Ward, Nagoya City, Aichi Prefecture,  
  
460-0004, Japan

(4) Product's model identifier

<b>VFS15-2075PM</b>	Series :	TOSVERT VF-S15
	Nominal frequency :	50 Hz
	Over load:	150% - 1min

(5) Apparent output power

13.7 kVA

(6) Motor rated power output Pn

7.5 kW

(7) Rated output current

33 A

(8) Maximum operating temperature

50 °C

(9) Rated supply frequency

50 Hz

(10) Rated supply voltage

240 VAC

(11) Exemption